


A B C D E F G H I J

1

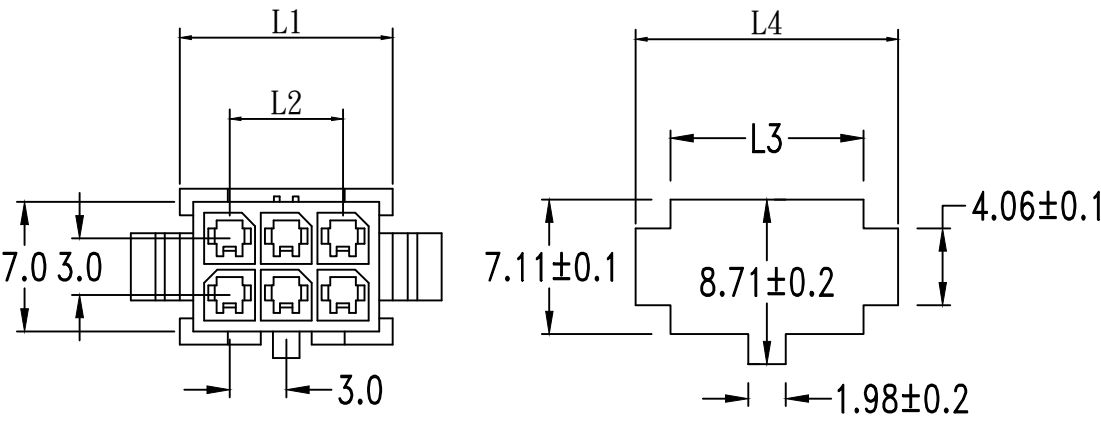

specifications

current rating:

Wire size	#20	#22	#24	#26	#28	#30
Ampere	5A	5A	4A	3A	2A	1A

voltage rating:250v

insulation resistance:1000MΩ min

dielectric withstanding:ac 1500v/minute


mates with :HT3001HM-X housing

accepts:HT300TM terminals

insulator material:UL 94V-0 nylon


color:black

packing:bag

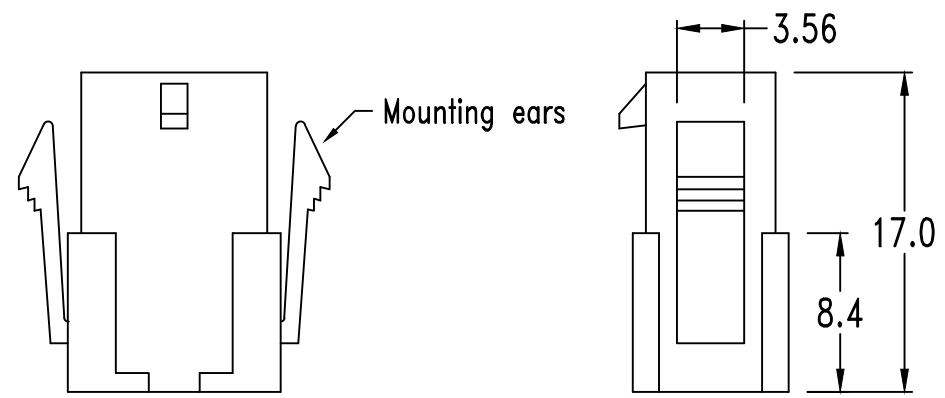

HOW TO ORDER

HT3001HFE-x



$L1=3.0*(NO. OF PIN/2)+1.0$   
 $L2=3.0*(NO. OF PIN/2-1)$   
 $L3=3.0*(NO. OF PIN/2)+1.21$   
 $L4=3.0*(NO. OF PIN/2)+4.88$

HTE TECHNOLOGY CO.,LTD  
**HTE** 興田科技有限公司

6

7

CUSTOMER APPROVAL

P/N

HT3001HFE-X

UNIT

mm

SIZE

A4

TITLE

3.0mm dual rows female ear housing

GENERAL TOLERANCE  
 0.=±0.25  
 0.0=±0.15  
 0.00=±0.05

SCALE

2:1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY

SHEET

1/1

A B C D E F G H I J