



$$L1 = 3.0 * (\text{NO. OF PIN} / 2) + 1.0$$

$$L2 = 3.0 * (\text{NO. OF PIN} / 2 - 1)$$

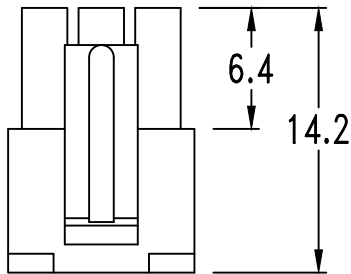

specifications

current rating:

Wire size	#20	#22	#24	#26	#28	#30
Ampere	5A	5A	4A	3A	2A	1A

voltage rating:250v

contact resistance:10mΩ max

dielectric withstanding:ac 1500v/minute

mates with :HT3001HF-X housing

accepts:HT300TF terminals


insulator material:UL 94V-0 nylon

color:black

packing:bag

HOW TO ORDER

HT3001HM-x



HTE TECHNOLOGY CO.,LTD
HTE 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT3001HM-X

UNIT mm

SIZE A4

TITLE

3.0mm dual rows
male housing

GENERAL
TOLERANCE
0.=±0.25
0.0=±0.15
0.00=±0.05

SCALE 2:1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY

SHEET 1/1