

$L1 = 3.0 * (\text{NO. OF PIN}) + 0.85$
 $L2 = 3.0 * (\text{NO. OF PIN} - 1)$
 $L3 = 3.0 * (\text{NO. OF PIN}) + 1.21$
 $L4 = 3.0 * (\text{NO. OF PIN}) + 4.88$

specifications
current rating:


Wire size	#20	#22	#24	#26	#28	#30
Ampere	5A	5A	4A	3A	2A	1A

voltage rating: 250v
 insulation resistance: 1000MΩ min
 dielectric withstanding: ac 1500v/minute

mates with :HT3002HM-X housing
 accepts:HT300TM terminals
 insulator material:UL 94V-0 nylon
 color:black

packing:bag

HOW TO ORDER

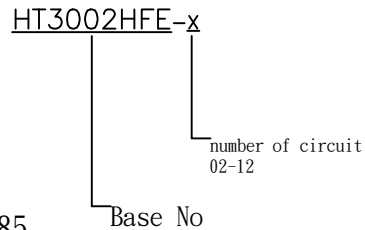

HTE TECHNOLOGY CO.,LTD
HTE 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT3002HFE-X

UNIT mm

SIZE A4

TITLE

3.0mm single row female ear housing

GENERAL TOLERANCE
 0.=±0.25
 0.0=±0.15
 0.00=±0.05

SCALE 2:1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY

SHEET 1/1