


A B C D E F G H I J

1

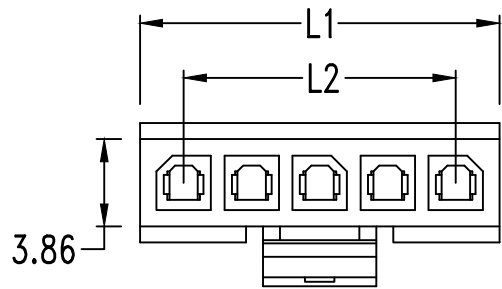

$L1 = 3.0 * (\text{NO. OF PIN}) + 1.0$
 $L2 = 3.0 * (\text{NO. OF PIN} - 1)$

2

3

4

5

6

7

specifications

current rating:

Wire size	#20	#22	#24	#26	#28	#30
Ampere	5A	5A	4A	3A	2A	1A

voltage rating:250v

contact resistance:10mΩ max

dielectric withstanding:ac 1500v/minute

mates with :HT3002HF-X housing

accepts:HT300TF terminals



insulator material:UL 94V-0 nylon

color:black

packing:bag

HOW TO ORDER

HT3002HM-x

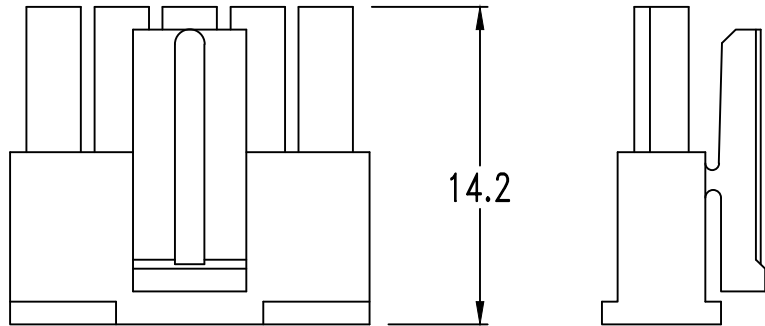

HTE TECHNOLOGY CO.,LTD
HTE 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT3002HM-X

UNIT mm

SIZE A4

TITLE

3.0mm single row
male housing

GENERAL TOLERANCE
 0.=±0.25
 0.0=±0.15
 0.00=±0.05

SCALE 2:1

SHEET 1/1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY

A

B

C

D

E

F

G

H

I

J