
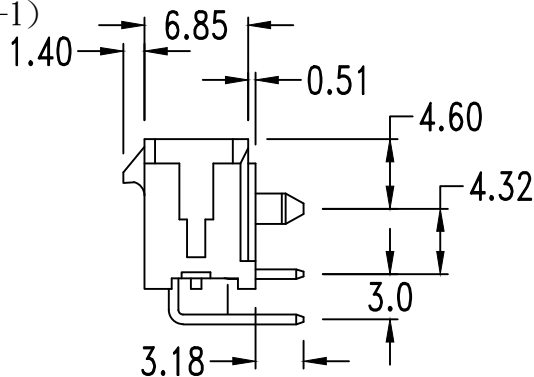


$L1 = 3.0 * (\text{NO. OF PIN} / 2) + 3.65$   
 $L2 = 3.0 * (\text{NO. OF PIN} / 2 - 1)$



specifications

current rating:

Wire size	#20	#22	#24	#26	#28	#30
Ampere	5A	5A	4A	3A	2A	1A

voltage rating: 250v

contact resistance: 10mΩ max

dielectric withstanding: ac 1500v/minute

mates with :HT3001HM-X housing

insulator material: 6T

contact material: BRASS



color: black

finish: 120u" tin plated

packing: bag/tray

HOW TO ORDER

HT3001W-x-x

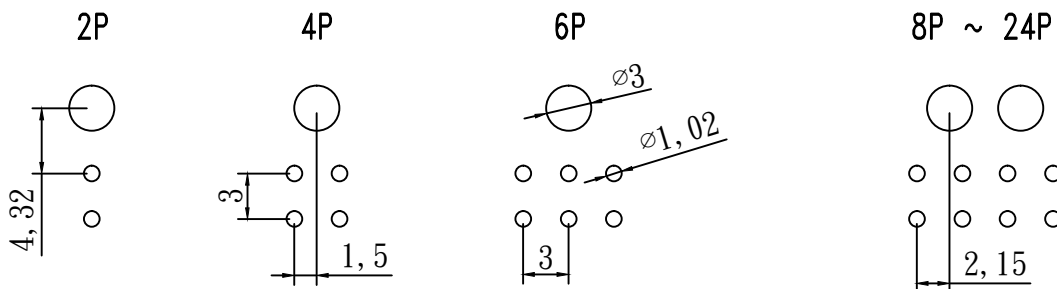

RECOMMENDED P.C.B. LAYOUT

HTE TECHNOLOGY CO., LTD  
**HTE** 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT3001WR-X

UNIT

mm

SIZE

A4

TITLE

3.0mm dual rows  
right angle type

GENERAL TOLERANCE  
 0.=±0.25  
 0.0=±0.15  
 0.00=±0.05

SCALE

2:1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY

SHEET

1/1