





A B C D E F G H I J

1

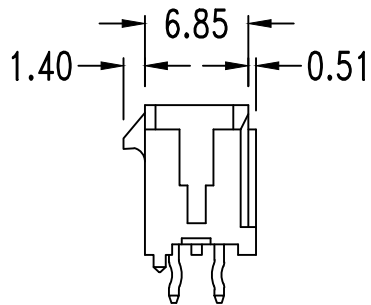

$L1 = 3.0 * (\text{NO. OF PIN} / 2) + 3.65$
 $L2 = 3.0 * (\text{NO. OF PIN} / 2 - 1)$



RECOMMENDED P.C.B. LAYOUT

specifications

current rating:

Wire size	#20	#22	#24	#26	#28	#30
Ampere	5A	5A	4A	3A	2A	1A

voltage rating:250v

contact resistance:10mΩ max

dielectric withstanding:ac 1500v/minute

mates with :HT3001HM-X housing

insulator material:6T

contact material: BRASS


color:black

finish:120u"tin plated

packing:bag

HOW TO ORDER

HT3001W-x-x

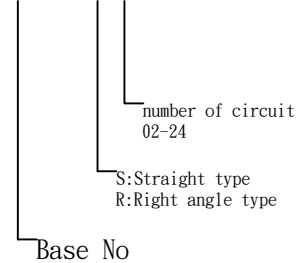

HTE TECHNOLOGY CO.,LTD
HTE 興田科技有限公司

2

2

3

3

4

4

5

5

6

6

7

7

CUSTOMER APPROVAL

P/N

HT3001WS-X

UNIT

mm

SIZE

A4

TITLE

3.0mm dual rows
straight type

GENERAL TOLERANCE
 0.=±0.25
 0.0=±0.15
 0.00=±0.05

SCALE

2:1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY

SHEET

1/1

A

B

C

D

E

F

G

H

I

J