





HT3001WTR-X-D



$L1 = 3.0 * (\text{NO. OF PIN} / 2) + 3.65$   
 $L2 = 3.0 * (\text{NO. OF PIN} / 2 - 1)$

HT3001WTR-X-F





$L1 = 3.0 * (\text{NO. OF PIN} / 2) + 3.65$   
 $L2 = 3.0 * (\text{NO. OF PIN} / 2 - 1)$


specifications  
 current rating:5A  
 voltage rating:250v  
 contact resistance:10mΩ max  
 dielectric withstanding:ac 1500v/minute  
 operating temperature:-25°c--85°c

mates with :HT3001HM-X housing  
 insulator material:LCP  
 contact material: BRASS  
 color:black  
 finish:120u"tin plated

packing:reel

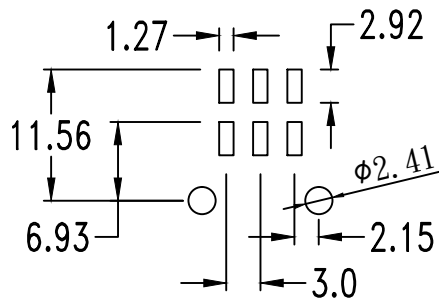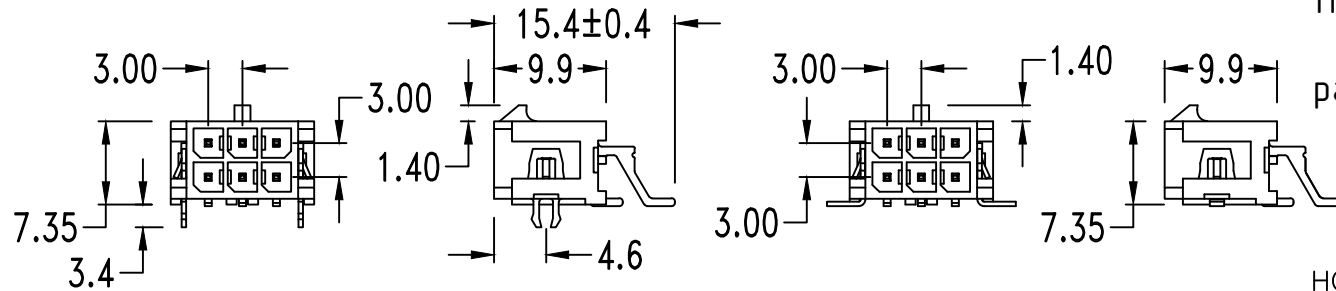


RECOMMENDED P.C.B. LAYOUT

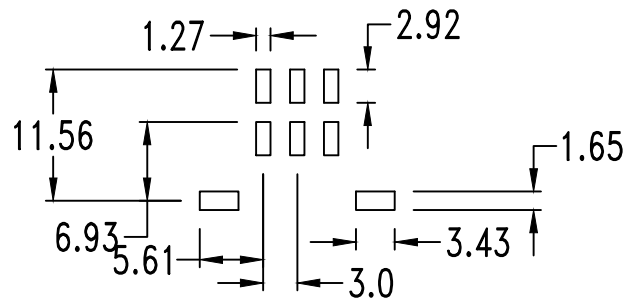

HOW TO ORDER

HT3001WTR-X-D/F



HTE TECHNOLOGY CO.,LTD  
**HTE** 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT3001WTR-X-D/F

UNIT

mm

SIZE

A4

TITLE

3.0mm dual rows smt  
right angle type

GENERAL TOLERANCE  
 0.=±0.25  
 0.0=±0.15  
 0.00=±0.05

SCALE

2:1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY

SHEET

1/1