



$$L1 = 1.27 * (\text{No. of pin} / 2) + 6.3$$

$$L2 = 1.27 * (\text{No. of pin} / 2) + 4.75$$

$$L3 = 1.27 * (\text{No. of pin} / 2 - 1)$$

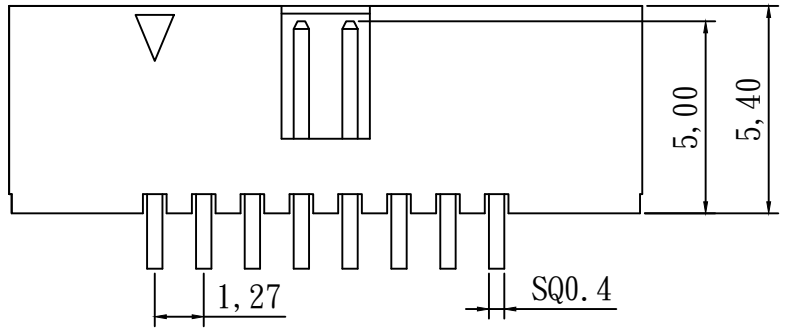

#### HOW TO ORDER

HT127B-x-x-2\*x-x


- type no.
- number of circuit 02-50
- Dual rows
- V6:6T
- V9:9T
- L:LCP
- S: Straight type
- R: Right angle type
- T: SMT
- Base No

#### specifications

current & voltage rating : 1A & 12Vac max  
 insulator resistance: 1000MΩ min.  
 contact resistance: 20 mΩ max.  
 dielectric withstanding: ac 500v  
 operating temperature: -40°C -- +105°C  
 max. processing temp: 245 ± 5°C for 3-5 seconds

contact material: phosphor bronze  
 insulator material: nylon 6T, nylon 9T, lcp  
 finish: gold flash

packing: bag / tray

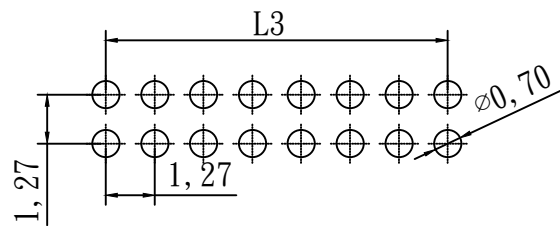

RECOMMENDED P. C. B. LAYOUT

HTE TECHNOLOGY CO., LTD  
**HTE** 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT127BRX-2\*X

UNIT

mm

SIZE

A4

TITLE

1.27mm box header  
right angle type

GENERAL TOLERANCE  
 0.=±0.30  
 0.0=±0.20  
 0.00=±0.15

SCALE

5:1

SHEET

1/1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY