
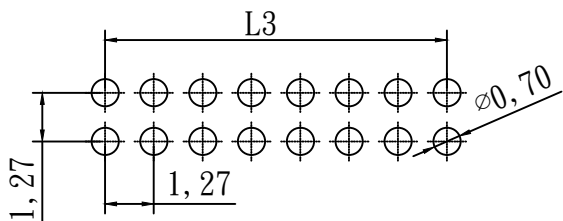
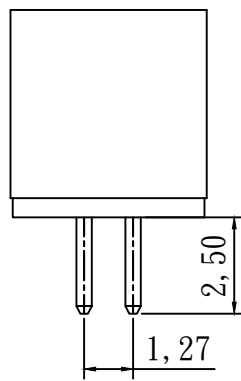


$$L1 = 1.27 * (\text{No. of pin} / 2) + 6.3$$

$$L2 = 1.27 * (\text{No. of pin} / 2) + 4.75$$

$$L3 = 1.27 * (\text{No. of pin} / 2 - 1)$$

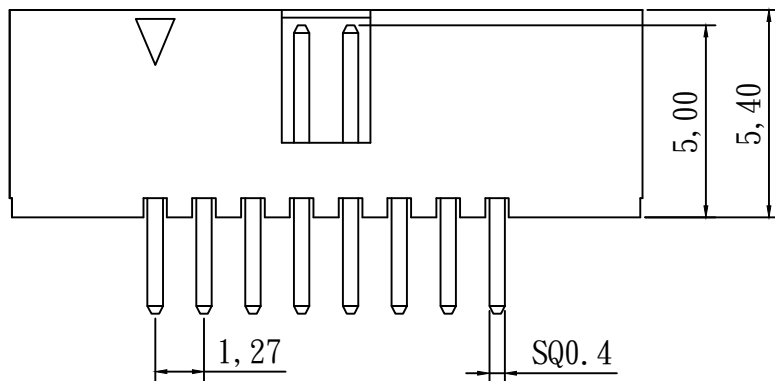

RECOMMENDED P. C. B. LAYOUT


### specifications

current&voltage rating :1A&12Vac max  
 insulator resistance:1000MΩ min.  
 contact resistance:20 mΩ max.  
 dielectric withstanding:ac 500v  
 ioperating temperature:-40°c--+105°c  
 max.processing temp:245±5°cfor3-5seconds

contact material:phosphor bronze  
 insulator material:nylon6T.nylon9T.lcp  
 finish:gold flash

packing:bag/tray

### HOW TO ORDER

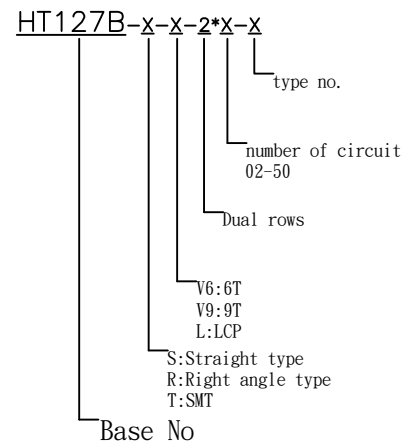

HTE TECHNOLOGY CO.,LTD  
**HTE** 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT127BSX-2\*X

UNIT

mm

SIZE

A4

TITLE

1.27mm box header straight type

GENERAL TOLERANCE  
 0.=±0.30  
 0.0=±0.20  
 0.00=±0.15

SCALE

5:1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY

SHEET

1/1