
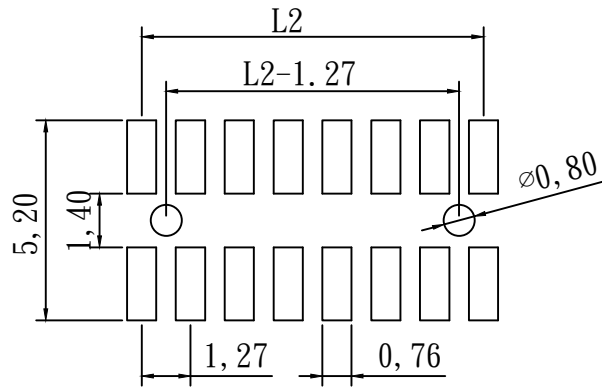



$$L1 = 1.27 * (\text{No. of pin} / 2) + 0.38$$

$$L2 = 1.27 * (\text{No. of pin} / 2 - 1)$$

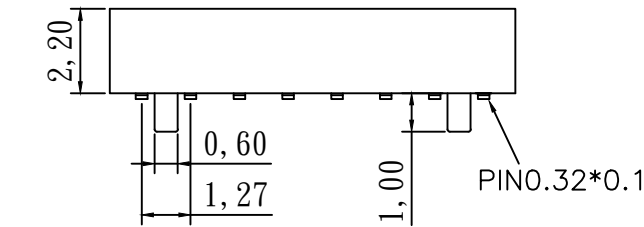

RECOMMENDED P. C. B. LAYOUT

### specifications

current&voltage rating :1A&12Vac max  
 insulator resistance:1000MΩ min.  
 contact resistance:20 mΩ max.  
 dielectric withstanding:ac 500v  
 ioperating temperature:-40°C--+105°C  
 max.processing temp:245±5°Cfor3-5seconds

contact material:phosphor bronze  
 insulator material:nylon6T.nylon9T.lcp  
 finish:gold flash

packing:bag/tube/reel

### HOW TO ORDER

HT127F22-x-x-1/2\*x-x

Base No

x: V6:6T  
 V9:9T  
 L:LCP

x: S: Straight type  
 R: Right angle type  
 T: SMT

1/2: number of circuit  
 02-50

x: type no.  
 Single row/Dual rows

HTE TECHNOLOGY CO.,LTD  
**HTE** 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT127F22TX-2\*X-I

UNIT

mm

SIZE

A4

TITLE

1.27mm female header  
 dual rows smt type

GENERAL  
 TOLERANCE  
 0.=±0.30  
 0.0=±0.20  
 0.00=±0.15

SCALE

5:1

SHEET

1/1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY