
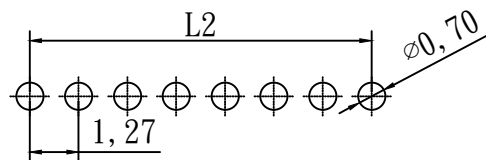



$$L1 = 1.27 * (\text{No. of pin}) + 0.38$$

$$L2 = 1.27 * (\text{No. of pin} - 1)$$

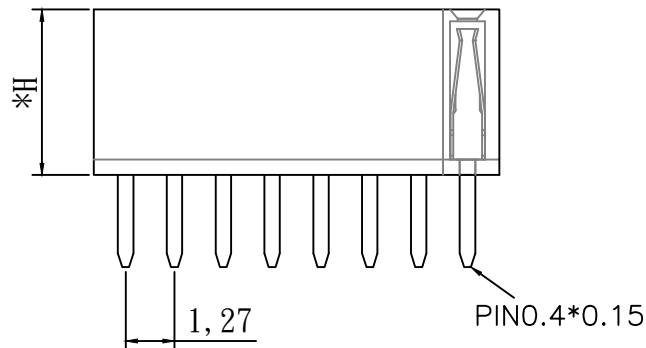

RECOMMENDED P. C. B. LAYOUT

specifications

current&voltage rating :1A&12Vac max
 insulator resistance:1000MΩ min.
 contact resistance:20 mΩ max.
 dielectric withstanding:ac 500v
 ioperating temperature:−40°c--+105°c
 max.processing temp:245±5°cfor3−5seconds

contact material:phosphor bronze
 insulator material:nylon6T.nylon9T.lcp
 finish:gold flash

packing:bag/tray

HOW TO ORDER

HT127F-x-x-x-1/2*x-x

type no.
 number of circuit
 02-50
 Single row/Dual rows
 V6:6T
 V9:9T
 L:LCP
 S:Straight type
 R:Right angle type
 T:SMT
 Housing height
 38 H=3.8mm
 43 H=4.3mm
 Base No

HTE TECHNOLOGY CO.,LTD
HTE 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT127FXSX-1*X

UNIT

mm

SIZE

A4

TITLE

1.27mm female header
 single row straight type

GENERAL
 TOLERANCE
 0.=±0.30
 0.0=±0.20
 0.00=±0.15

SCALE

5:1

SHEET

1/1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY