
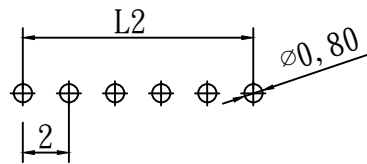


$$L1 = 2.0 * (\text{No. of pin}) + 0.5$$

$$L2 = 2.0 * (\text{No. of pin} - 1)$$

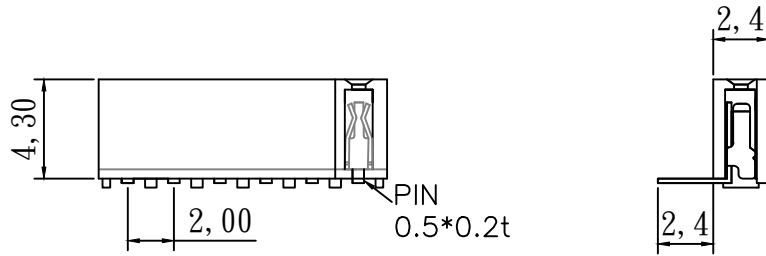

RECOMMENDED P.C.B. LAYOUT

### specifications

current rating: 2amp  
 voltage rating: 200V ac max  
 insulator resistance: 3000 M ohms min.  
 contact resistance: 20 m ohms max.  
 dielectric withstanding: 500v ac for one minute  
 operating temperature:  $-40^{\circ}\text{C}$  --  $+105^{\circ}\text{C}$  (ny6t/ny9t)  
 max. processing temp:  $245 \pm 5^{\circ}\text{C}$  for 3-5 seconds (ny6t/ny9t)

contact material: phosphor bronze  
 insulator material: nylon6t/nylon9t  
 color: black  
 finish: gold flash

packing: bag/tray/tube

### HOW TO ORDER

HT200F43-x-x-1/2\*x-x

- Base No
- V6: 6T
- V9: 9T
- S: Straight type
- R: Right angle type
- T: SMT
- Single row/Dual rows
- number of circuit 02-40
- type no.

HTE TECHNOLOGY CO., LTD  
**HTE** 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT200F43RX-1\*X

UNIT

mm

SIZE

A4

TITLE

2.00mm female header  
 single row right angle type

GENERAL TOLERANCE  
 0.= $\pm 0.30$   
 0.0= $\pm 0.20$   
 0.00= $\pm 0.15$

SCALE

3:1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY

SHEET

1/1