
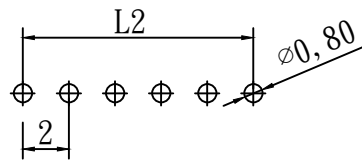


$$L1 = 2.0 * (\text{No. of pin}) + 0.5$$

$$L2 = 2.0 * (\text{No. of pin} - 1)$$

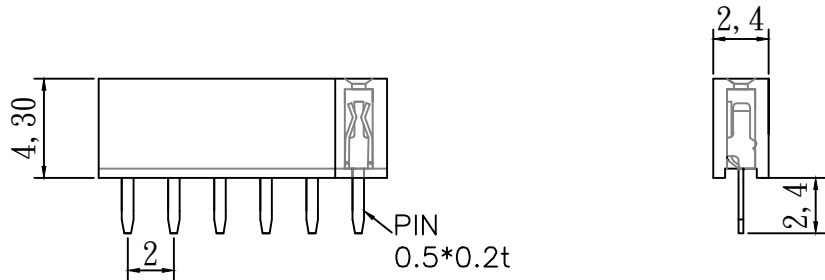

RECOMMENDED P.C.B. LAYOUT

specifications

current rating: 2amp
 voltage rating: 200V ac max
 insulator resistance: 3000 M ohms min.
 contact resistance: 20 m ohms max.
 dielectric withstanding: 500v ac for one minute
 operating temperature: -40°C -- +105°C (ny6t/ny9t)
 max. processing temp: 245±5°C for 3-5 seconds (ny6t/ny9t)

contact material: phosphor bronze
 insulator material: nylon6t nylon9t
 color: black
 finish: gold flash

packing: bag/tray

HOW TO ORDER

HT200F43-x-x-1/2*x-x

Base No | V6:6T | V9:9T | S: Straight type | R: Right angle type | T: SMT | Single row/Dual rows | number of circuit 02-40 | type no.

HTE TECHNOLOGY CO., LTD
 HTE 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT200F43SX-1*X

UNIT

mm

SIZE

A4

TITLE

2.00mm female header
 single row straight type

GENERAL TOLERANCE

0.=±0.30

0.0=±0.20

0.00=±0.15

SCALE

3:1

SHEET

1/1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY