
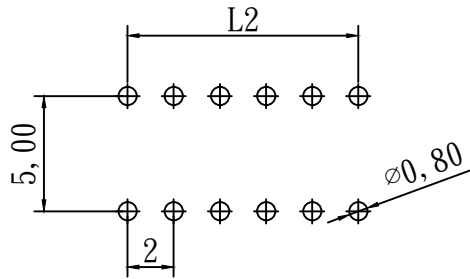



$$L1 = 2.0 * (\text{No. of pin} / 2) + 0.5$$

$$L2 = 2.0 * (\text{No. of pin} / 2 - 1)$$

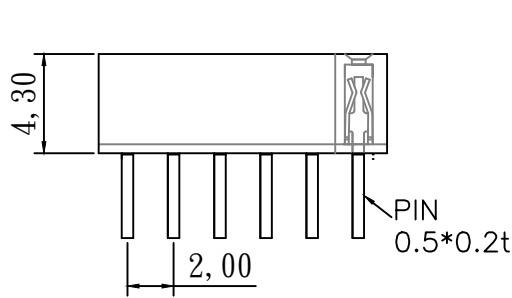

RECOMMENDED P.C.B. LAYOUT

specifications

current rating: 2amp
 voltage rating: 200V ac max
 insulator resistance: 3000 M ohms min.
 contact resistance: 20 m ohms max.
 dielectric withstanding: 500v ac for one minute
 operating temperature: -40°C -- +105°C (ny6t/ny9t)
 max. processing temp: 245±5°C for 3-5 seconds (ny6t/ny9t)

contact material: phosphor bronze
 insulator material: nylon6t/nylon9t
 color: black
 finish: gold flash

packing: bag/tube/reel

HOW TO ORDER

HT200F43-x-x-1/2*x-x

- Base No
- V6: 6T
- V9: 9T
- S: Straight type
- R: Right angle type
- T: SMT
- Single row/Dual rows
- number of circuit 02-40
- type no.

HTE TECHNOLOGY CO., LTD
HTE 興田科技有限公司

CUSTOMER APPROVAL

P/N HT200F43X-2*X-5.0

UNIT mm SIZE A4

TITLE 2.0mm Female Header dual rows entry Type

GENERAL TOLERANCE 0.=±0.30

REV. DESCRIPTION DATE DRAWN LILY CHECKED SANDY

0.0=±0.20 0.00=±0.15 SCALE 3:1 SHEET 1/1