



$$L1 = 2.0 * (\text{No. of pin} / 2) + 0.5$$

$$L2 = 2.0 * (\text{No. of pin} / 2 - 1)$$

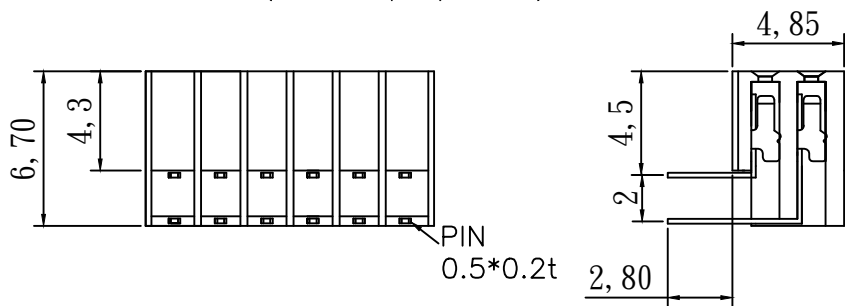

PIN  
0.5\*0.2t

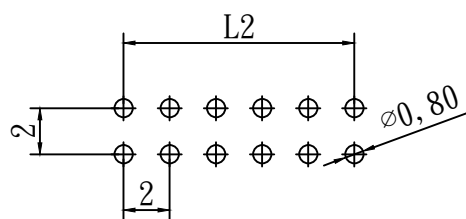

RECOMMENDED P.C.B. LAYOUT

### specifications

current rating:2amp  
 voltage rating:200V ac max  
 insulator resistance:3000 M ohms min.  
 contact resistance:20 m ohms max.  
 dielectric withstanding:500v ac for one minute  
 operating temperature:-40°C--+105°C(ny6t/ny9t)  
 max.processing temp:245±5°C for 3-5seconds(ny6t/ny9t)

contact material:phosphor bronze  
 insulator material:nylon6t/nylon9t  
 color:black  
 finish:gold flash

packing:bag/tray/tube

### HOW TO ORDER

HT200F67-x-x-1/2\*x-x

Base No

V6:6T  
V9:9T

S: Straight type  
R: Right angle type  
T: SMT

Single row/Dual rows

number of circuit  
02-40

type no.

HTE TECHNOLOGY CO.,LTD  
**HTE** 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT200F67RX-2\*X

UNIT mm

SIZE A4

TITLE

2.0mm Female Header  
dual rows right angle Type

GENERAL TOLERANCE  
0.=±0.30  
0.0=±0.20  
0.00=±0.15

SCALE 3:1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY

SHEET 1/1