
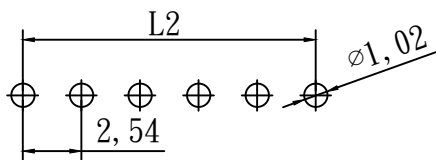



$L1 = 2.54 * (\text{No. of pin}) + 0.5$
 $L2 = 2.54 * (\text{No. of pin} - 1)$

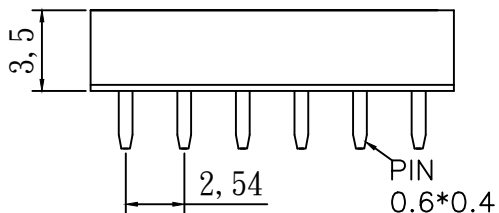

RECOMMENDED P.C.B. LAYOUT

specifications

current rating:3amp
 voltage rating:250V ac max
 insulator resistance:5000 M ohms min.
 contact resistance:20 m ohms max.
 dielectric withstanding:500v ac for one minute
 operating temperature:-40°C--+105°C(ny6t/ny9t)
 max.processing temp:245±5°C for 3-5seconds(ny6t/ny9t)

contact material:phosphor bronze
 insulator material:nylon6t nylon9t
 color:black
 finish:gold flash

packing:bag/tray

HOW TO ORDER

HT254F35-x-x-1/2*x-x
 Base No | | | | | type no.
 | | | | | number of circuit
 | | | | | 02-40
 | | | | | Single row/Dual rows
 | | | | | V6:6T
 | | | | | V9:9T
 | | | | | S: Straight type
 | | | | | R: Right angle type
 | | | | | T: SMT

HTE TECHNOLOGY CO.,LTD
HTE 興田科技有限公司

CUSTOMER APPROVAL						P/N	HT254F35SX-1*X			UNIT	mm	SIZE	A4
						TITLE	2.54mm female header single row straight type			GENERAL TOLERANCE		SCALE	3:1
			REV.	DESCRIPTION	DATE	DRAWN	LILY	CHECKED	SANDY	0.=±0.30 0.0=±0.20 0.00=±0.15		SHEET	1/1