
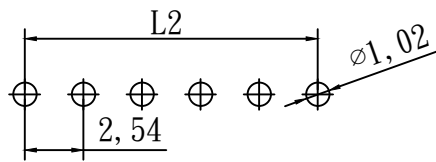
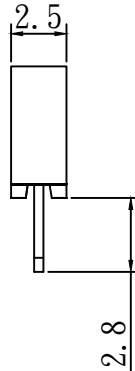


$$L1 = 2.54 * (\text{No. of pin}) + 0.5$$

$$L2 = 2.54 * (\text{No. of pin} - 1)$$

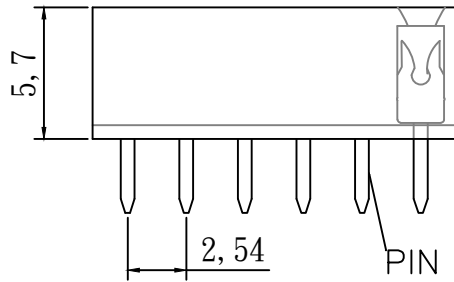

RECOMMENDED P.C.B. LAYOUT

specifications

current rating:3amp
 voltage rating:250V ac max
 insulator resistance:5000 M ohms min.
 contact resistance:20 m ohms max.
 dielectric withstanding:500v ac for one minute
 operating temperature:-40°C--+105°C(ny6t/ny9t)
 max.processing temp:245±5°C for 3-5seconds(ny6t/ny9t)

contact material:phosphor bronze
 insulator material:nylon6t nylon9t
 color:black
 finish:gold flash

packing:bag/tray

HOW TO ORDER

HT254F57-x-x-1/2*x-x

Base No | type no. | number of circuit (02-40) | Single row/Dual rows | V6:6T | V9:9T | S: Straight type | R: Right angle type | T: SMT

HTE TECHNOLOGY CO.,LTD
HTE 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT254F57SX-1*X

UNIT

mm

SIZE

A4

TITLE

2.54mm female header
 single row straight type

GENERAL TOLERANCE
 0.=±0.30
 0.0=±0.20
 0.00=±0.15

SCALE

3:1

SHEET

1/1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY