




A B C D E F G H I J

1

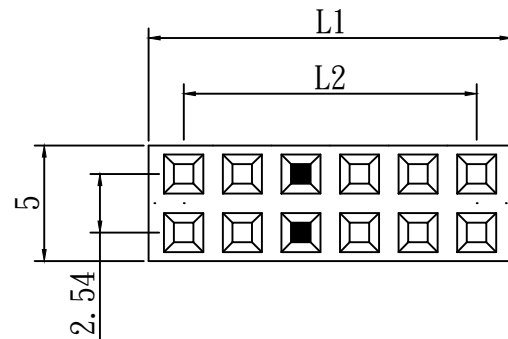


$$L1 = 2.54 * (\text{No. of pin} / 2) + 0.5$$
$$L2 = 2.54 * (\text{No. of pin} / 2 - 1)$$

3

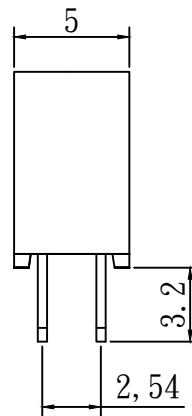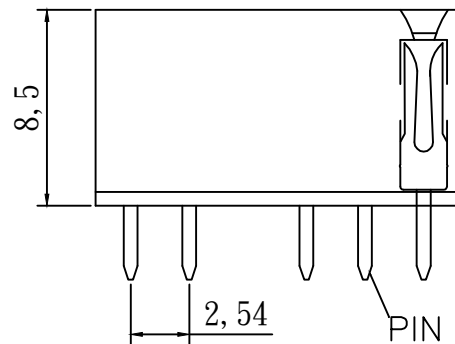

5

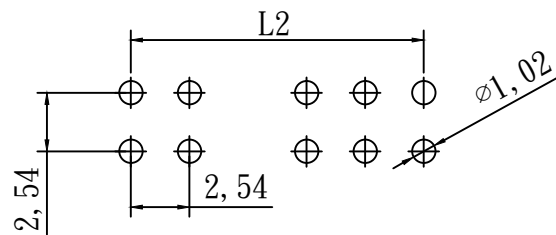

RECOMMENDED P.C.B. LAYOUT

6

specifications

current rating:3amp
voltage rating:250V ac max
insulator resistance:5000 M ohms min.
contact resistance:20 m ohms max.
dielectric withstanding:500v ac for one minute
operating temperature:-25°C--+85°C(pbt)
-40°C--+105°C(ny6t/ny9t)
max.processing temp:245±5°C for 3-5seconds(ny6t/ny9t)

contact material:brass
insulator material:pbt nylon6t nylon9t
color:black
finish:gold flash

packing:bag/tray

HOW TO ORDER

HT254F85-x-x-1/2*x-x

Base No

type no.

number of circuit
02-40

Single row/Dual rows

G:PBT
V6:6T
V9:9T

S:Straight type
R:Right angle type

HTE TECHNOLOGY CO.,LTD
HTE 興田科技有限公司

7

CUSTOMER APPROVAL

P/N

HT254F85SX-2*X-K

UNIT

mm

SIZE

A4

TITLE

2.54mm female header
dual rows straight type

GENERAL
TOLERANCE
0.=±0.30
0.0=±0.20
0.00=±0.15

SCALE

3:1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY

SHEET

1/1

A B C D E F G H I J