

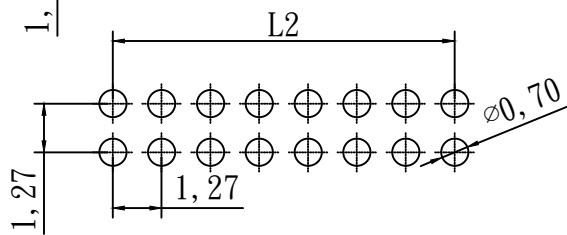


$$L1 = 1.27 * (\text{No. of pin} / 2)$$

$$L2 = 1.27 * (\text{No. of pin} / 2 - 1)$$

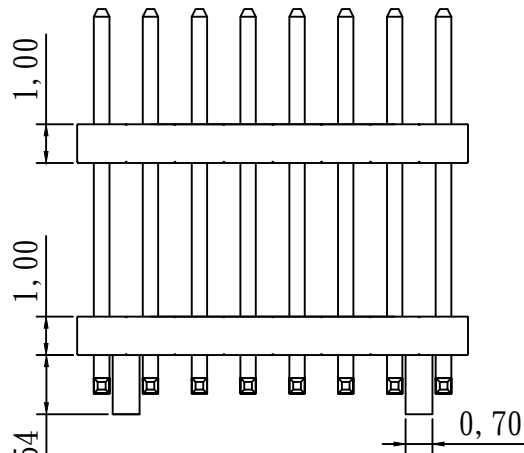

RECOMMENDED P. C. B. LAYOUT

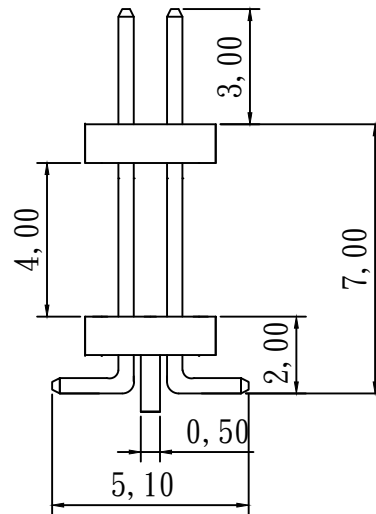

### specifications

current&voltage rating :1A&12Vac max  
 insulator resistance:1000MΩ min.  
 contact resistance:20 mΩ max.  
 dielectric withstanding:ac 500v  
 ioperating temperature:-40°c--+105°c  
 max.processing temp:245±5°cfor3-5seconds

contact material:phosphor bronze  
 insulator material:nylon6T.nylon9T.lcp  
 finish:gold flash

packing:bag/tube

### HOW TO ORDER

HT127P2-x-x-1/2\*x-x

Base No

type no.

number of circuit  
02-50

Single row/Dual rows

V6:6T  
 V9:9T  
 L:LCP

S: Straight type  
 R: Right angle type  
 T: SMT

HTE TECHNOLOGY CO.,LTD  
**HTE** 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT127P2TX-2\*X-I

UNIT

mm

SIZE

A4

TITLE

1.27mm pin header  
 dual rows smt type

GENERAL  
 TOLERANCE

0.=±0.30

0.0=±0.20

0.00=±0.15

SCALE

5:1

SHEET

1/1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY