

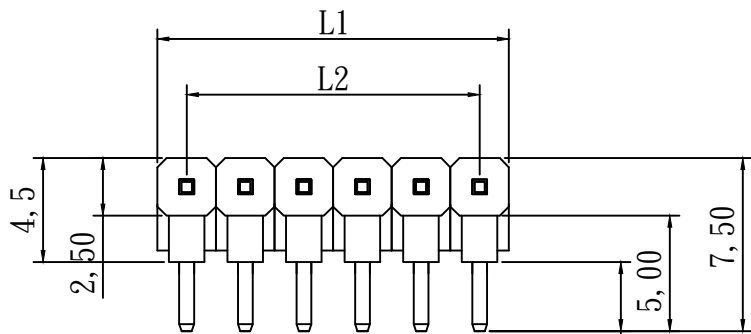
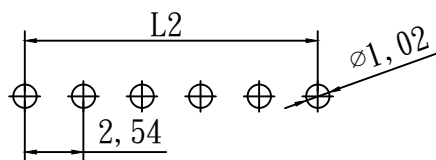


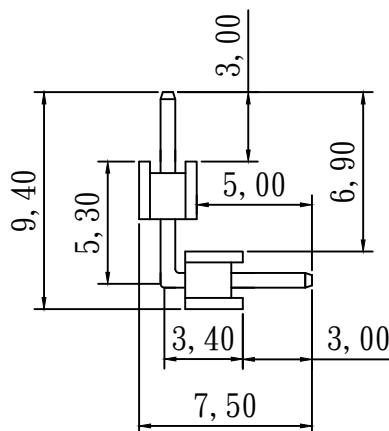

$$L1 = 2.54 * (\text{No. of pin})$$
$$L2 = 2.54 * (\text{No. of pin} - 1)$$

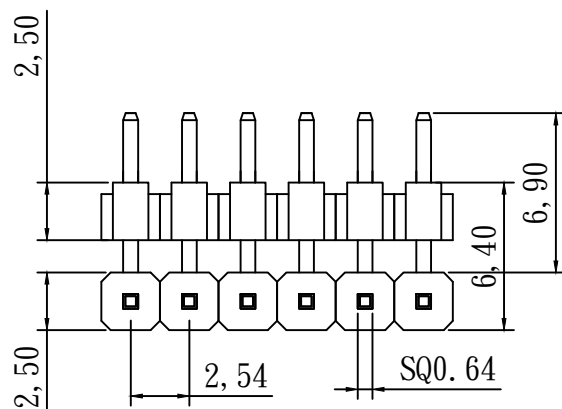

RECOMMENDED P.C.B. LAYOUT

specifications

current rating:3amp
voltage rating:250V ac max
insulator resistance:5000 M ohms min.
contact resistance:20 m ohms max.
dielectric withstanding:500v ac for one minute
operating temperature:-25°c--+85°c(pbt)
-40°c--+105°c(ny6t/ny9t)
max.processing temp:245±5°c for 3-5seconds(ny6t/ny9t)

contact material:brass
insulator material:pbt nylon6t nylon9t
color:black
finish:gold flash

packing:bag

HOW TO ORDER

HT254P-x-x-1/2*x-x

Base No

G:PBT
V6:6T
V9:9T

S:Straight type
R:Right angle type
T:SMT

type no.

number of circuit
02-40

Single row/Dual rows

HTE TECHNOLOGY CO.,LTD
HTE 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT254P2RX-1*X

UNIT

mm

SIZE

A4

TITLE

2.54mm pin header
single row right angle type

GENERAL
TOLERANCE
0.=±0.30
0.0=±0.20
0.00=±0.15

SCALE

3:1

SHEET

1/1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY

A

B

C

D

E

F

G

H

I

J