


RECOMMENDED P.C.B. LAYOUT

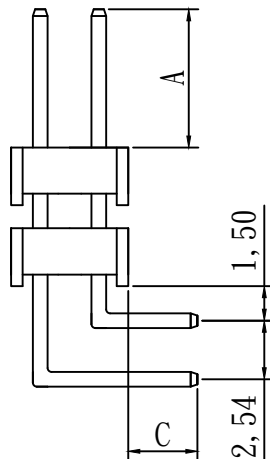

specifications

current rating: 3amp
 voltage rating: 250V ac max
 insulator resistance: 5000 M ohms min.
 contact resistance: 20 m ohms max.
 dielectric withstanding: 500v ac for one minute
 operating temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ (pbt)
 $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ (ny6t/ny9t)
 max. processing temp: $245 \pm 5^{\circ}\text{C}$ for 3-5 seconds (ny6t/ny9t)

contact material: brass
 insulator material: pbt nylon6t nylon9t
 color: black
 finish: gold flash

packing: bag

HOW TO ORDER

HT254P-x-x-1/2*x-x
 type no.
 number of circuit
 02-40
 Single row/Dual rows
 G: PBT
 V6: 6T
 V9: 9T
 S: Straight type
 R: Right angle type
 T: SMT
 Base No

HTE TECHNOLOGY CO., LTD
HTE 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT254P2RX-2*X

UNIT

mm

SIZE

A4

TITLE

2.54mm pin header
dual rows right angle type

GENERAL TOLERANCE
 0.= ± 0.30
 0.0= ± 0.20
 0.00= ± 0.15

SCALE

3:1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY

SHEET

1/1