

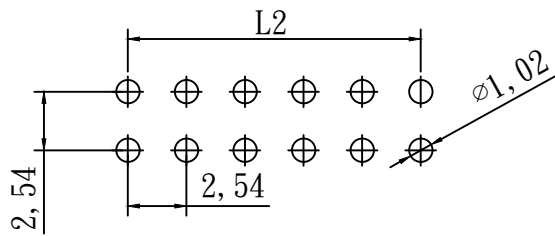


$$L1 = 2.54 * (\text{No. of pin} / 2)$$

$$L2 = 2.54 * (\text{No. of pin} / 2 - 1)$$

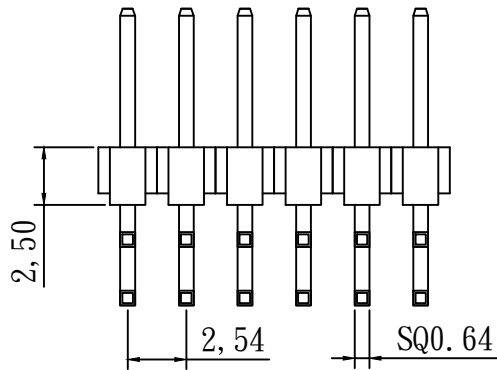

RECOMMENDED P.C.B. LAYOUT

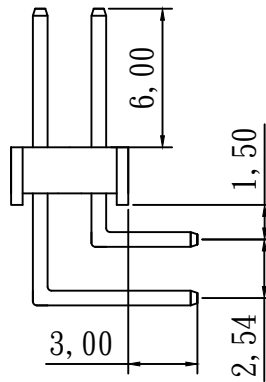

specifications

current rating: 3amp
 voltage rating: 250V ac max
 insulator resistance: 5000 M ohms min.
 contact resistance: 20 m ohms max.
 dielectric withstanding: 500v ac for one minute
 operating temperature: -25°C -- +85°C (pbt)
 -40°C -- +105°C (ny6t/ny9t)
 max. processing temp: 245±5°C for 3-5 seconds (ny6t/ny9t)

contact material: brass
 insulator material: pbt nylon6t nylon9t
 color: black
 finish: gold flash

packing: bag

HOW TO ORDER

HT254P-x-x-1/2*x-x

- type no.
- number of circuit 02-40
- Single row/Dual rows
- G: PBT
- V6: 6T
- V9: 9T
- S: Straight type
- R: Right angle type
- T: SMT
- Base No

HTE TECHNOLOGY CO., LTD
HTE 興田科技有限公司

CUSTOMER APPROVAL					P/N	HT254PRX-2*X			UNIT	mm	SIZE	A4
					TITLE	2.54mm pin header dual rows right angle type			GENERAL TOLERANCE		SCALE	3:1
			REV.	DESCRIPTION	DATE	DRAWN	LILY	CHECKED	SANDY	SHEET		1/1