
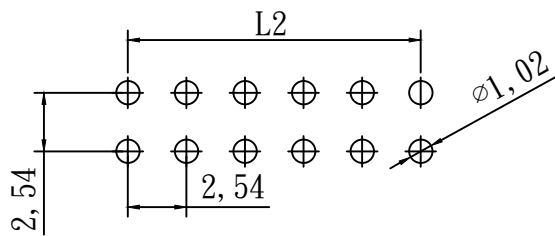
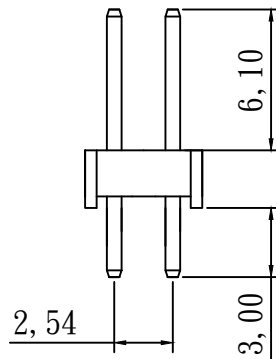


$$L1 = 2.54 * (\text{No. of pin} / 2)$$

$$L2 = 2.54 * (\text{No. of pin} / 2 - 1)$$

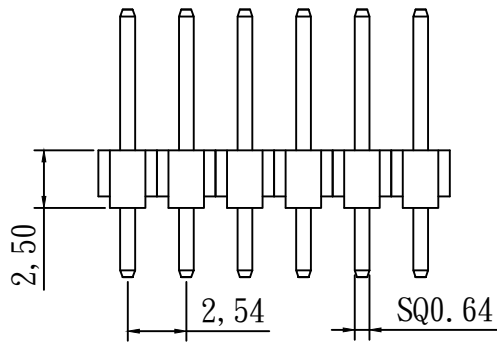

RECOMMENDED P.C.B. LAYOUT

### specifications

current rating: 3amp  
 voltage rating: 250V ac max  
 insulator resistance: 5000 M ohms min.  
 contact resistance: 20 m ohms max.  
 dielectric withstanding: 500v ac for one minute  
 operating temperature: -25°C -- +85°C (pbt)  
 -40°C -- +105°C (ny6t/ny9t)  
 max. processing temp: 245±5°C for 3-5 seconds (ny6t/ny9t)

contact material: brass  
 insulator material: pbt nylon6t nylon9t  
 color: black  
 finish: gold flash

packing: bag

### HOW TO ORDER

HT254P-x-x-1/2\*x-x

Base No

G: PBT  
 V6: 6T  
 V9: 9T

S: Straight type  
 R: Right angle type  
 T: SMT

number of circuit  
 02-40

Single row/Dual rows

type no.

HTE TECHNOLOGY CO., LTD  
**HTE** 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT254PSX-2\*X

UNIT

mm

SIZE

A4

TITLE

2.54mm pin header  
 dual rows straight type

GENERAL TOLERANCE  
 0.=±0.30  
 0.0=±0.20  
 0.00=±0.15

SCALE

3:1

SHEET

1/1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY