






$$L1 = 2.0 \times (\text{No. of pin})$$

$$L2 = 2.0 \times (\text{No. of pin} - 1)$$

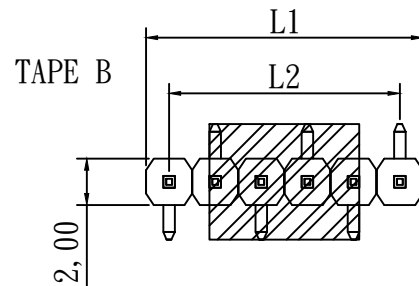

$$L1 = 2.0 \times (\text{No. of pin})$$

$$L2 = 2.0 \times (\text{No. of pin} - 1)$$

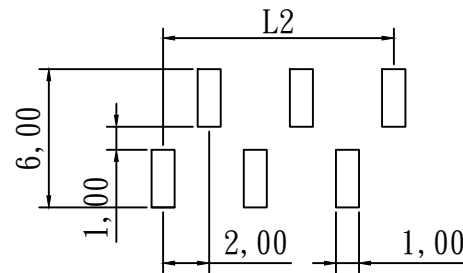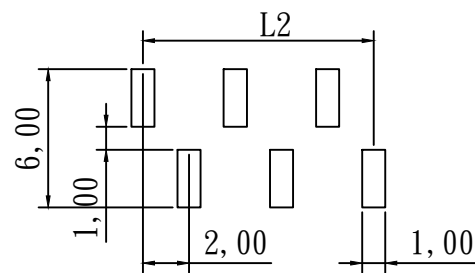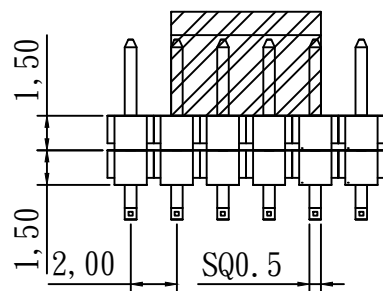

RECOMMENDED P.C.B. LAYOUT(TA)

RECOMMENDED P.C.B. LAYOUT(TB)

specifications

current rating:2amp
voltage rating:200V ac max
insulator resistance:3000 M ohms min.
contact resistance:20 m ohms max.
dielectric withstanding:500v ac for one minute
operating temperature:-40°C--+105°C(ny6t/ny9t)
max.processing temp:245±5°C for 3-5seconds(ny6t/ny9t)

contact material:brass
insulator material:nylon6t nylon9t
color:black
finish:gold flash

packing:bag/tube/reel

HOW TO ORDER

HT200P2-x-x-1/2*x-x

type no.

number of circuit
02-40

Single row/Dual rows

V6:6T
V9:9T

S: Straight type
R: Right angle type
T: SMT

Base No

HTE TECHNOLOGY CO.,LTD
HTE 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT200P2TX-1*X-H1.5-C

UNIT

mm

SIZE

A4

TITLE

2.00mm pin header
single row SMT type H:1.5*2

GENERAL
TOLERANCE
0.=±0.30
0.0=±0.20
0.00=±0.15

SCALE

3:1

SHEET

1/1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY