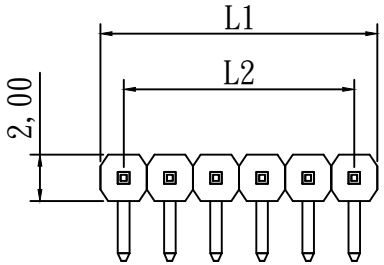

L1=2.0*(No.of pin)
L2=2.0*(No.of pin−1)

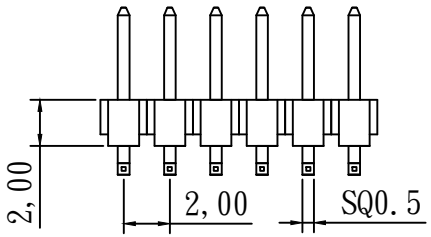



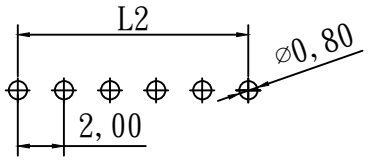

RECOMMENDED P.C.B. LAYOUT

specifications

current rating:2amp
voltage rating:200V ac max
insulator resistance:3000 M ohms min.
contact resistance:20 m ohms max.
dielectric withstanding:500v ac for one minute
operating temperature:−25°c−−+85°c(pbt)
−40°c−−+105°c(ny6t/ny9t)
max.processing temp:245±5°c for 3−5seconds(ny6t/ny9t)

contact material:brass
insulator material:pbt nylon6t nylon9t
color:black
finish:gold flash

packing:bag

HOW TO ORDER

HT200P-X-X-1/2*X-X

- type no.
- number of circuit 02-40
- Single row/Dual rows
- G:PBT V6:6T V9:9T
- S:Straight type R:Right angle type T:SMT
- Base No

HTE TECHNOLOGY CO.,LTD
HTE 興田科技有限公司

CUSTOMER APPROVAL				P/N	HT200PRX−1*X			UNIT	mm	SIZE	A4
				TITLE	2.00mm pin header single row.right angle type			GENERAL TOLERANCE 0.=±0.30 0.0=±0.20 0.00=±0.15		SCALE	3:1
	REV.	DESCRIPTION	DATE	DRAWN	LILY	CHECKED	SANDY			SHEET	1/1