
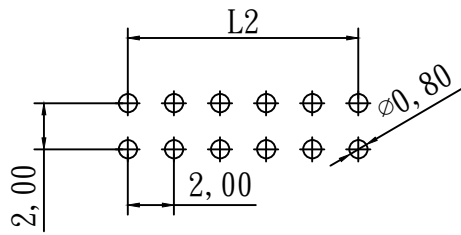



$$L1 = 2.00 * (\text{No. of pin} / 2)$$

$$L2 = 2.00 * (\text{No. of pin} / 2 - 1)$$

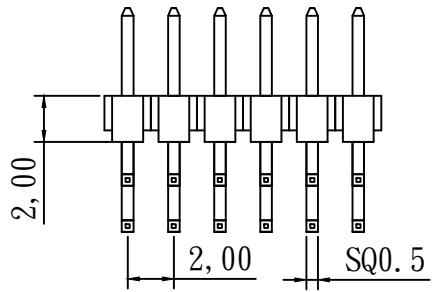

RECOMMENDED P.C.B. LAYOUT

specifications

current rating: 2amp
 voltage rating: 200V ac max
 insulator resistance: 3000 M ohms min.
 contact resistance: 20 m ohms max.
 dielectric withstanding: 500v ac for one minute
 operating temperature: -25°C -- +85°C (pbt)
 -40°C -- +105°C (ny6t/ny9t)
 max. processing temp: 245±5°C for 3-5 seconds (ny6t/ny9t)

contact material: brass
 insulator material: pbt nylon6t nylon9t
 color: black
 finish: gold flash

packing: bag

HOW TO ORDER

HT200P-x-x-1/2*x-x

type no.
 number of circuit
 02-40
 Single row/Dual rows
 G: PBT
 V6: 6T
 V9: 9T
 S: Straight type
 R: Right angle type
 T: SMT
 Base No

HTE TECHNOLOGY CO., LTD
 HTE 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT200PRX-2*X

UNIT

mm

SIZE

A4

TITLE

2.00mm pin header
 dual rows, right angle type

GENERAL TOLERANCE

0.=±0.30

0.0=±0.20

0.00=±0.15

SCALE

3:1

SHEET

1/1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY