

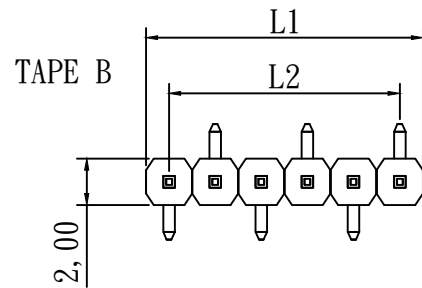
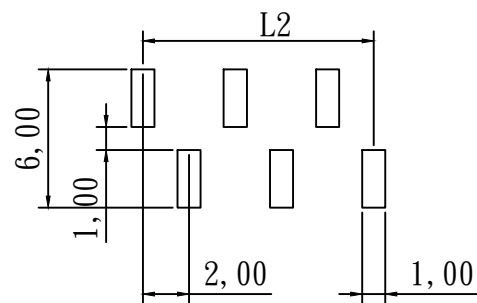



$L1 = 2.0 * (\text{No. of pin})$
 $L2 = 2.0 * (\text{No. of pin} - 1)$



$L1 = 2.0 * (\text{No. of pin})$
 $L2 = 2.0 * (\text{No. of pin} - 1)$

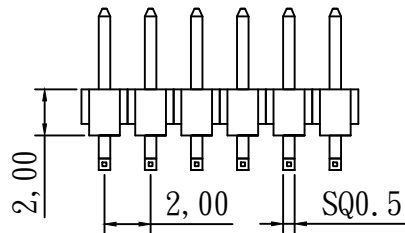

RECOMMENDED P.C.B. LAYOUT(TA)

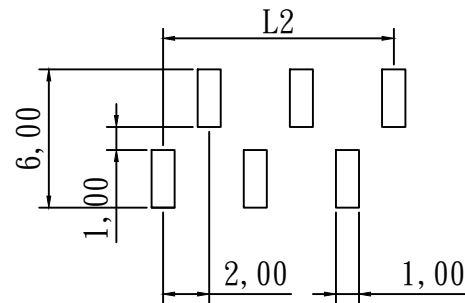

RECOMMENDED P.C.B. LAYOUT(TB)

specifications

current rating:2amp
 voltage rating:200V ac max
 insulator resistance:3000 M ohms min.
 contact resistance:20 m ohms max.
 dielectric withstanding:500v ac for one minute
 operating temperature: -40°C--+105°C(ny6t/ny9t)
 max.processing temp:245±5°C for 3-5seconds(ny6t/ny9t)

contact material:brass
 insulator material:nylon6t nylon9t
 color:black
 finish:gold flash

packing:bag/tube/reel

HOW TO ORDER

HT200P-x-x-1/2*x-x
 Base No
 type no.
 number of circuit
 02-40
 Single row/Dual rows
 G:PBT
 V6:6T
 V9:9T
 S:Straight type
 R:Right angle type
 T:SMT

HTE TECHNOLOGY CO.,LTD
 HTE 興田科技有限公司

CUSTOMER APPROVAL

P/N

HT200PTX-1*X

UNIT mm

SIZE A4

TITLE

2.00mm pin header
 single row.smt type

GENERAL TOLERANCE
 0.=±0.30
 0.0=±0.20
 0.00=±0.15

SCALE 3:1

REV.

DESCRIPTION

DATE

DRAWN

LILY

CHECKED

SANDY

SHEET 1/1